


## contents

- a. Backboard
- b. Hoop and Net
- c. Koosh Ball
- d. Foam Bumper Pads (7)
- e. Door Brackets (2)
- f. Screws for Brackets (4)

(Note: Colors, style and size of actual product may vary)

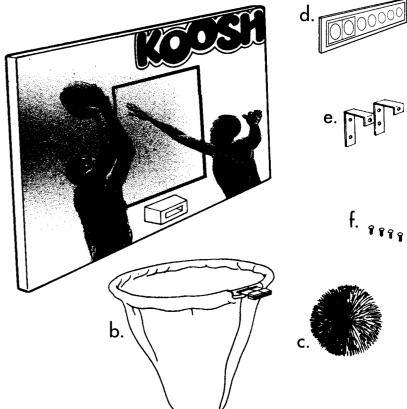

## **Assembly Instructions On Back**

If any contents are missing, please call: 1 (800) 75 KOOSH and ask for Customer Service.

## assembly

### to hang the backboard on a door

#### **TOOL REQUIRED: Screwdriver**

- 1. Peel off and apply foam bumper pads (see Figure 1). Apply round pads to the seven posts on the back of the backboard (see Figure 2). Apply the square pads to the inside surface of each door bracket (see Figure 3).
- 2. Attach door hooks to backboard as follows:

#### If the door is normal thickness (approximately 1 3/8" thick):

Attach the door hooks to the outer set of cylinders in the upper corners of the backboard (see Figure 4A).

#### If the door is 1 3/4" thick:

Attach the door hooks to the inner set of cylinders (see Figure 4B).

- 3. Before attaching the hoop and net to the backboard, check that the net is hanging right side out and that the net does not get caught between the hoop and the backboard (this would prevent the hoop from attaching properly).
- 4. Insert tabs on the hoop snugly into the slot in the front of the backboard. The hoop will snap into place when in proper position (see Figure 5).
- 5. Hang the backboard on top of the door.








Figure 3




Figure 4A




Figure 4B




Figure 5

# breakaway hoop feature

When hoop is pulled down towards the floor with excessive force, the hoop will release to avoid hoop damage. (see Figure 6)

To return hoop to its original position, push hoop back up towards top of backboard until it snaps into place. (see Figure 7)




Figure 6




Figure 7