



Bat-Signal Jet

INSTRUCTIONS




Kenner Products, A Division of Tonka Corporation, Cincinnati, Ohio 45202
BATMAN and all related elements are the property of DC Comics Inc. TM and © 1993 All Rights Reserved.

ASSEMBLY


1

Apply labels following numbers on label sheet using these illustrations as a guide.

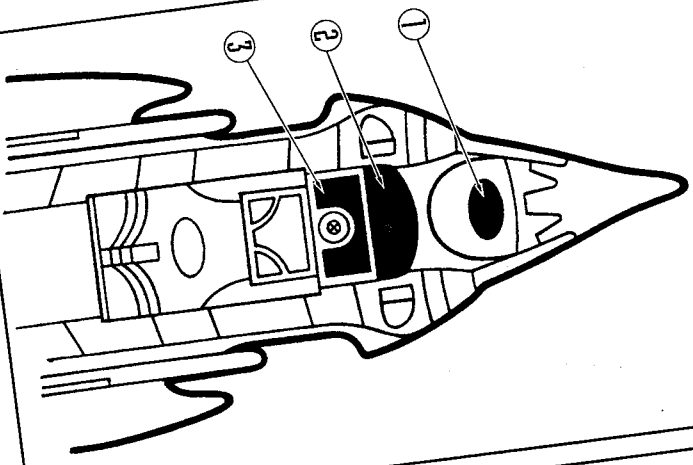


2

Have an adult remove the screw and battery compartment door to install batteries. Takes 2 "AA" Alkaline batteries. **IMPORTANT:** Be sure to push and hold lens housing in when replacing screw.

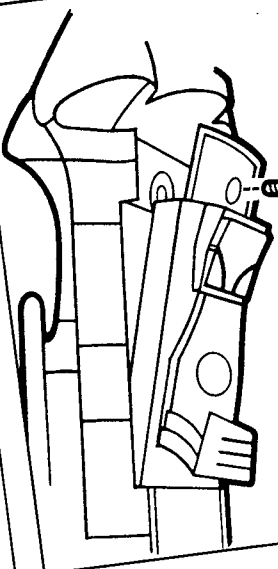


3

Battery position.

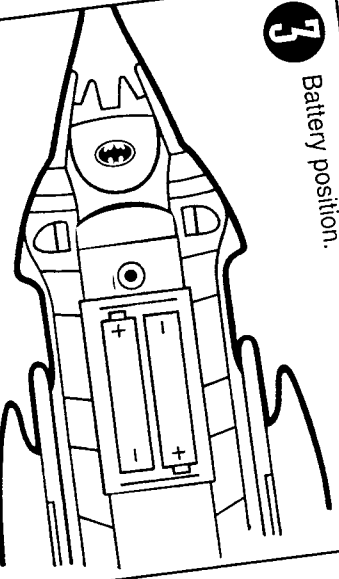

Position figure as shown.

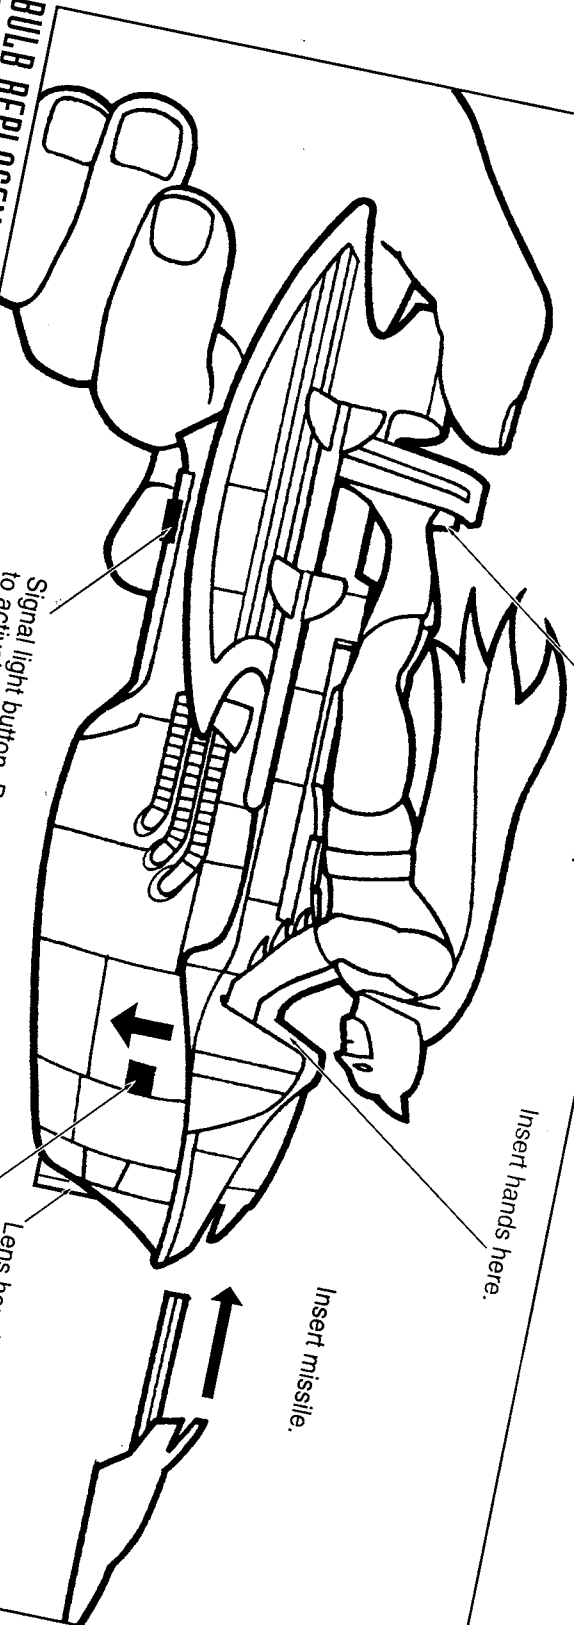

Insert feet here.

Insert hands here.

Insert missile.

Signal light button. Press to activate Bat-Signal™ Light.

Firing button. Press down to release missile.

BULB REPLACEMENT - ADULTS ONLY

- 1 Remove screw.
- 2 Slide out lens housing.
- 3 Remove bulb holder.
- 4 Replace with #222 bulb. (Bulb may need to be rotated in holder to improve focus.)
- 5 Slide in bulb holder with new bulb.
- 6 Replace lens housing.
- 7 **IMPORTANT:** Push and hold lens housing in while replacing Test light.