




# BATMAN<sup>®</sup> CRIME CONTROL SET INSTRUCTIONS

63270


## 1. BAT EMBLEM BUCKLE



REAR

Press to light

Open door and insert "AA" alkaline battery as shown, by inserting positive end first.

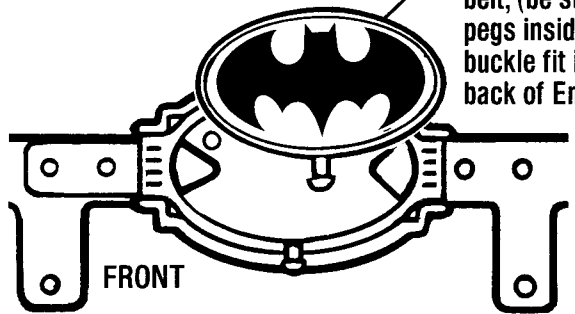

FRONT

Insert Bat Emblem into belt, (be sure pegs inside buckle fit into back of Emblem).

## 2. ASSEMBLE WEAPONS TO BELT



Snap "Freeze Ray" to belt, by inserting peg on belt, into hole in "Freeze Ray".



Snap "Walkie Talkie" to belt, by inserting peg on belt, into hole in "Walkie Talkie".




Snap "Binoculars" to belt, by inserting peg on belt, into hole in "Binoculars".



Add "Microphone" to loop in belt.

## 3.

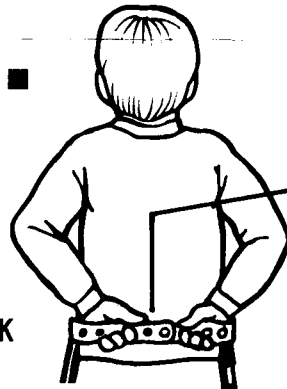

BACK

Adjust to fit by inserting pegs into holes.


## 4.




FRONT

Second adjustment in front to make 1" larger if necessary


# 5. ASSEMBLE IN ANY ORDER

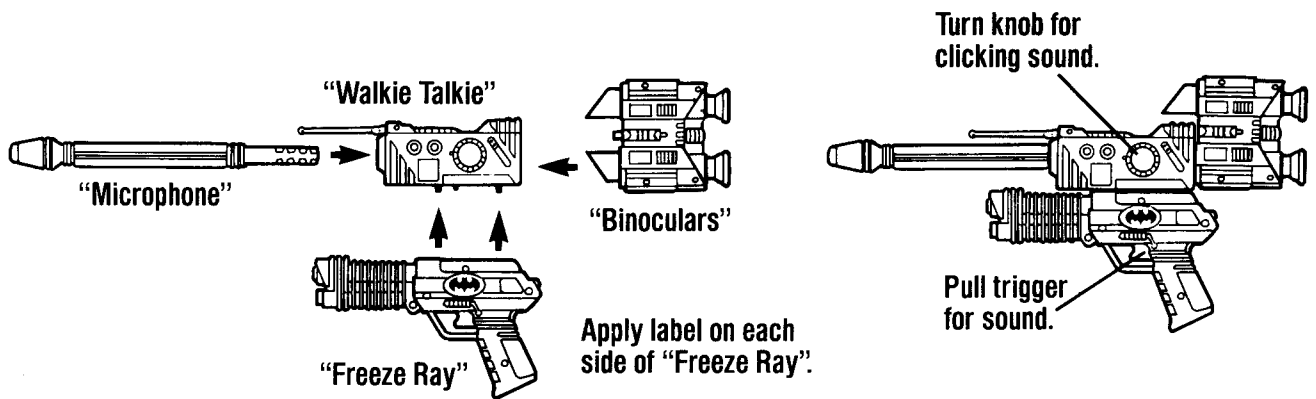


# 6. BULB REPLACEMENT

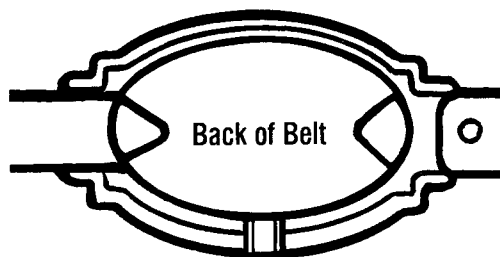


A. Use finger to push out light unit.

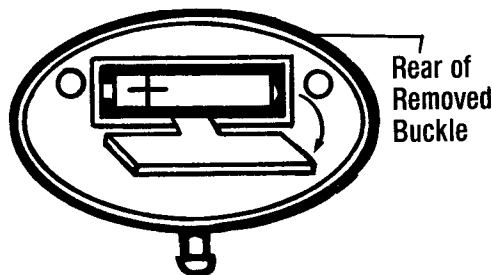


B. Unlatch door and tilt it down. Remove battery.

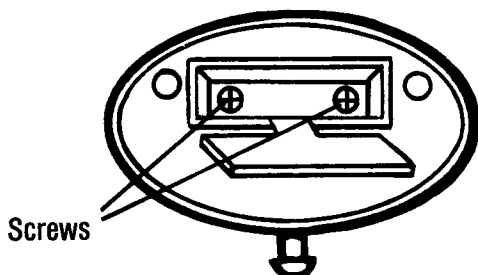


C. With a phillips screwdriver, remove only the 2 screws inside the battery compartment. This will allow removal of the bulb cover. A “bulb guard” will fall inside of bulb cover when screws are removed.

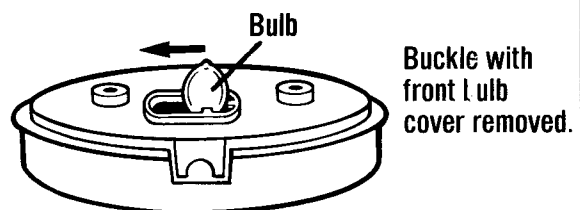

D. To remove bulb, slide bulb to left and lift out gently.

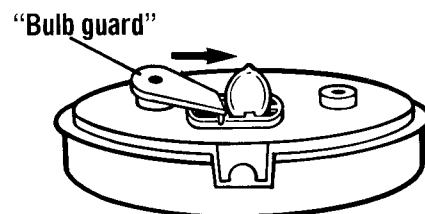

E. Replace with #PR-4 bulb by inserting it gently in left side of opening and sliding to the right. Replace “bulb guard” as shown, hold it in place as you replace bulb cover.

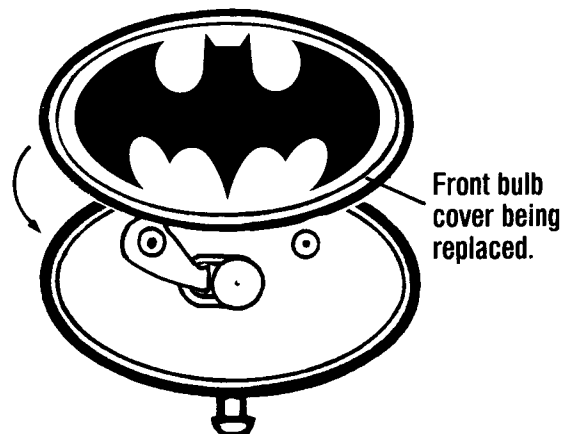

F. Hold assembled buckle in place while replacing the two screws.  
 G. Replace battery and latch door.  
 H. Replace light unit into the belt.