






## **ASSEMBLY**

1. Attach handle bars to bike, one side at a time, as shown.




2. Snap sidecar onto bike.

3. Locate take-up wheel at back of sidecar. Turn wheel to take up all of the string. Then load capture claw into launcher until it snaps into place.




© 1994 Kenner, A Division of Tonka Corporation, Cincinnati, Ohio 45202 Jurassic Park\*\* & @Universal City Studios, Inc. and Amblin Entertainment, Inc. All Rights Reserved, Licensed by MCA/Universal Merchandising, Inc.


51166600

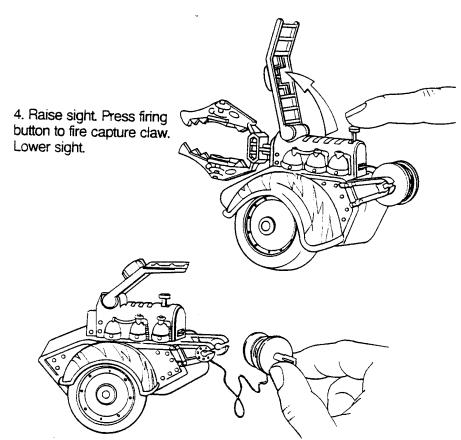

5. You may remove take-up wheel to untangle string, if necessary.



6. Sidecar has two legs that should be lowered when it is not attached to bike.



7. Figure rides on bike as shown.