


## BATTERY INSTALLATION

Use a Phillips screwdriver to loosen screw in battery compartment door (screw remains attached to door). Remove door. Insert 2 "AA" alkaline batteries. Replace door and tighten screw.

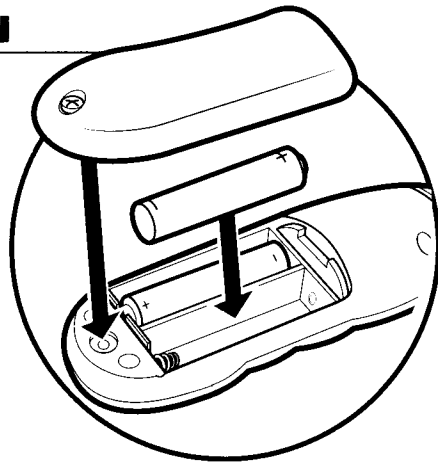

### ⚠ CAUTION: TO AVOID BATTERY LEAKAGE

- 1) Be sure to insert the batteries correctly and always follow the toy and battery manufacturers' instructions;
- 2) Do not mix old and new batteries or alkaline, standard (carbon-zinc) or rechargeable (nickel-cadmium) batteries;
- 3) Always remove weak or dead batteries from the product.

### EASY 3-STEP CLEANUP!

1. Place PLAY-DOH® Brand Modeling Compound back in cans and seal lid.
2. Remove excess from carpets/fabrics, then allow remaining compound to dry.
3. Loosen dried compound with stiff brush and vacuum clean. If necessary, brush with gentle soap and cold water. (Do not use hot water or cleaning solutions to clean PLAY-DOH® compound from carpets/fabrics.)



# Doctor Drill 'n Fill™

Thank you for choosing this fun-filled Play-Doh® brand playset!

Requires 2 "AA" alkaline batteries (not included). Phillips screwdriver required (not included) for battery installation.

