

# SCAMPS™

THE WALK AND CUDDLE PUPPY

## INSTRUCTIONS

**NOTE**

Scamps' Leash cannot be taken apart once it is assembled. To fluff Scamps' fur, give him a gentle shake. Scamps walks best on smooth, even surfaces, like linoleum, tile and low pile carpeting.

1. Remove all parts from cardboard packaging.
2. Assemble the leash and walking mechanism, by following the pictures below:

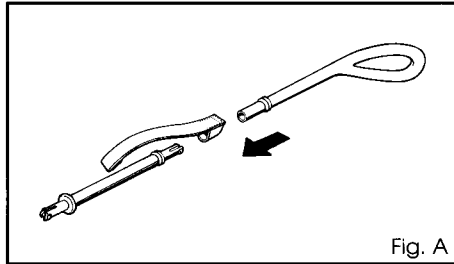


Fig. A

Push Extender into Handle until it locks into place. (Figure A)

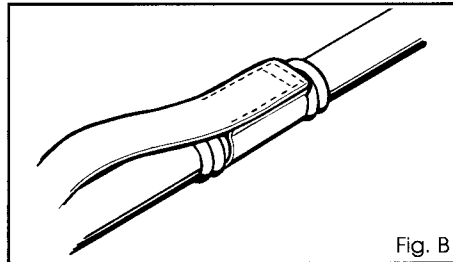


Fig. B

The fabric tube of the strap will be held in place by the round markings on plastic leash. (Figure B)

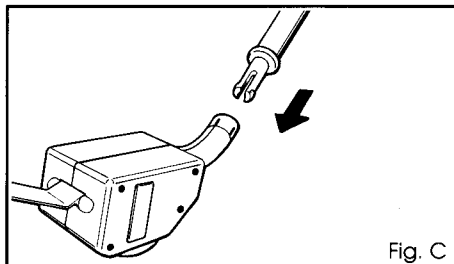


Fig. C

Insert Extender into Walking Mechanism until it locks into place. (Figure C)

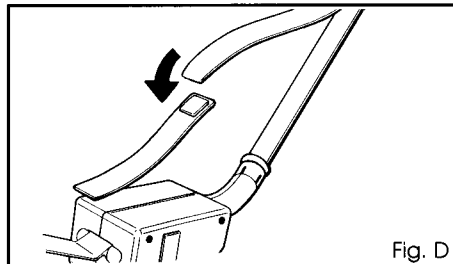


Fig. D

Use Velcro® connector to add extra length of strap. (Figure D)

### 3. Attach Scamps to Mechanism

Insert plastic lever into pocket on underside of Dog (Figure E).

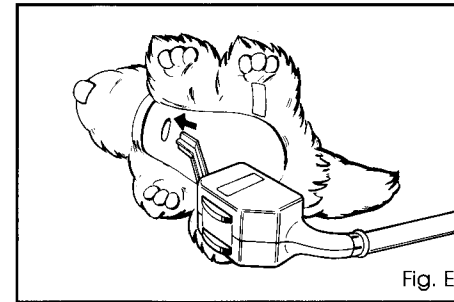


Fig. E

Lever will point towards Dog's head and should extend just to Dog's chin.

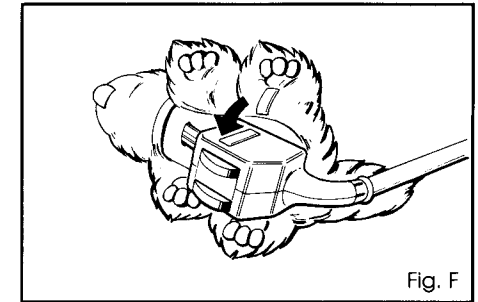


Fig. F

Dog's back legs are attached to mechanism with Velcro®.

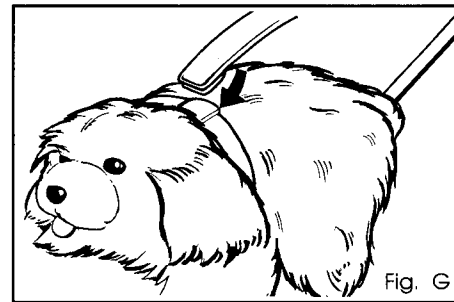


Fig. G

Fabric strap attaches to Dog's collar with Velcro®.

### To remove Scamps from Mechanism:

Lift up on each of the Dog's back legs to loosen Velcro® attachment.

Pull Dog forward to remove from plastic lever.